



Ver.	Modify No.	Details	Area	P.I.C	Date


Front View

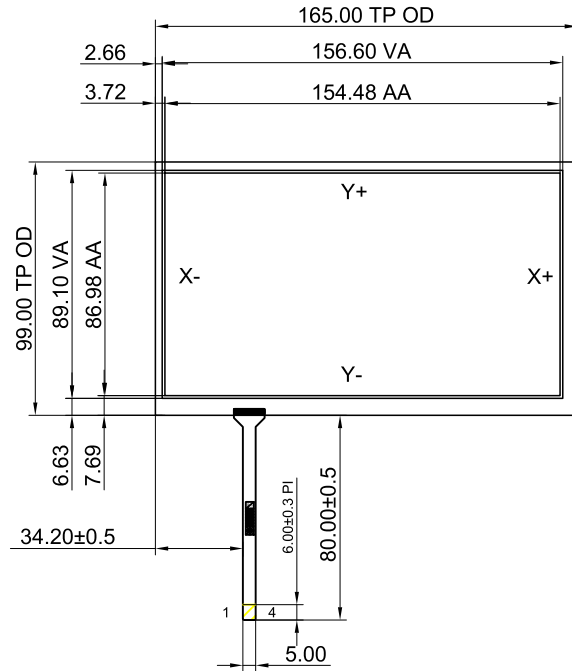

Side View

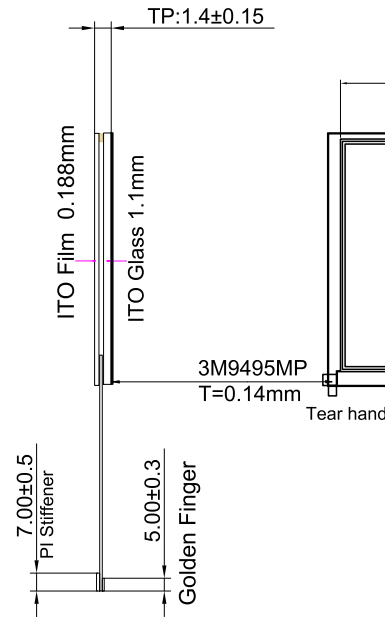

Back View

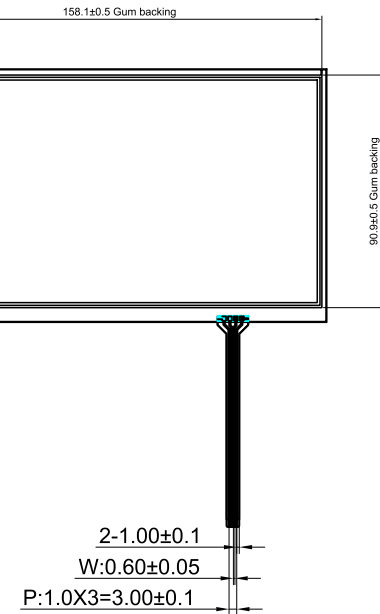

Description:

- structure: Film+Glass+Tail;  
Film: Fog face anti-Newton ring, 0.188mm, 350~500Ω/□  
Glass: Ordinary Glass, 1.1mm, 350~500Ω/□
- Supply voltage: DC5V 1mA;
- Insulation impedance: ≥20MΩ (25V DC);
- Linearity: ≤ 1.5%;
- Transmittance: ≥ 75%;
- Operating pressure: 60-120g;
- Service life: ≥1,00,000 times;
- Dot life: ≥ 1000000 times;
- Surface hardness: ≥3H
- Corresponding time: ≤15ms
- Working environment: -20°C~+70°C
- Storage environment: -30°C~+80°C;
- Circuit resistance X(Glass):350-1000 Ω Y(Film):150-550 Ω;
- Dimension tolerance is ±0.30;
- Products comply with ROHS.

Pin NO:	Assignment
1	X-
2	Y-
3	X+
4	Y+

Part No.		MST-RT-TPB-7			
 Product Name: 7 inch Touch Panel		Drawing No.	R070B211130		
		Project Code.	R070B		
Designed by:	Curry.Wang	Business Unit:	Period Mark	View Angle	Ratio
Checked by:	Betty.Fu	SNT-BTP	A		1:1
Approved by:	Cale.Chen				
Workmanship:	GUAN	BOM Code	1.14.070.02.0000	Page 1	Total 1 Page
Standardization:	Link.Chen	Product Series	BTP-RT	 思诺泰科创电子(苏州)有限公司	
Released by:	Rocky.Liu				