



Ver.	Modify No.	Details	Area	P.I.C	Date


Front View

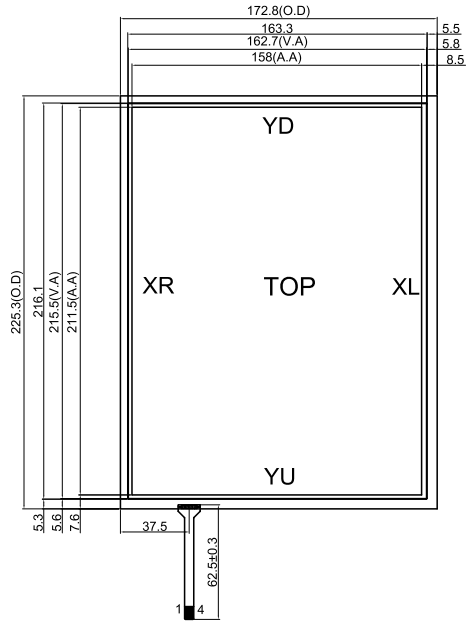

Side View

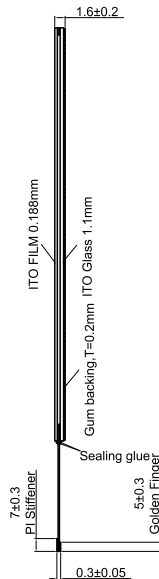

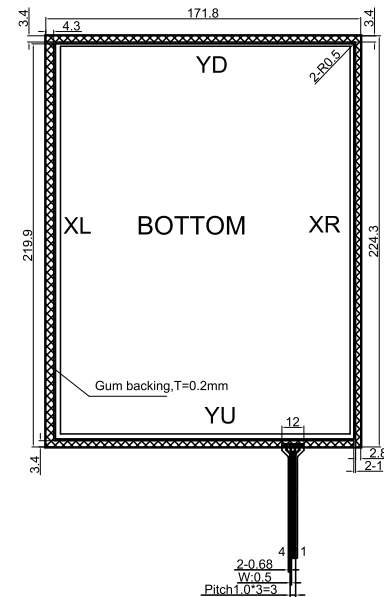


Back View



Pin No.	Symbol
1	XR
2	YU
3	XL
4	YD

Description:

- structure: Film+Glass+Tail;
Film: Clear hard Anti-newton rings,0.188mm
Glass: Ordinary Glass,1.1mm, Surface haze <8%
- Supply voltage: DC5V 1mA;
- Insulation impedance: ≥20MΩ (25V DC);
- Linearity: ≤ 1.5%;
- Transmittance: ≥ 76%;
- Operating pressure: 60-120g;
- Service life: ≥1,000,000 times;
- Dot life: ≥ 100000 times;
- Surface hardness: ≥3H
- Corresponding time: ≤15ms
- Working environment: -20℃~+70℃
- Storage environment: -30℃~+80℃;
- Circuit resistance X(Glass):200-500Ω Y(Film):350-850 Ω;
- Dimension tolerance is ±0.30;
- Products comply with ROHS.

Part No.	MST-RT-TPS-10.4		
 Product Name: 10.4 inch Touch Panel	Drawing No.	R104S211202	
	Project Code.	R104S	
Business Unit:	Period Mark	View Angle	Ratio
SNT-BTP	A		1:1
Workmanship: GUAN	BOM Code	1.14.104.01.0000	Page 1 Total 1 Page
Standardization: Link.Chen	Product Series	BTP-RT	 思诺泰科创电子(苏州)有限公司 SINOTECHNICS INC.
Released by: Rocky.Liu			