



Ver.	Modify No.	Details	Area	P.I.C	Date


Front View

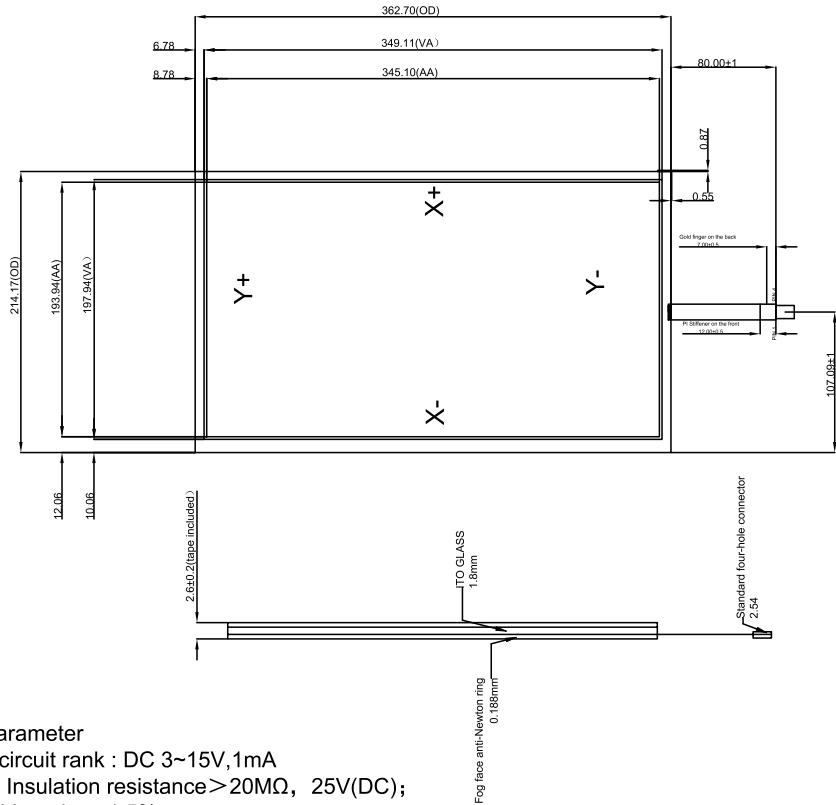

Side View



Bottom View

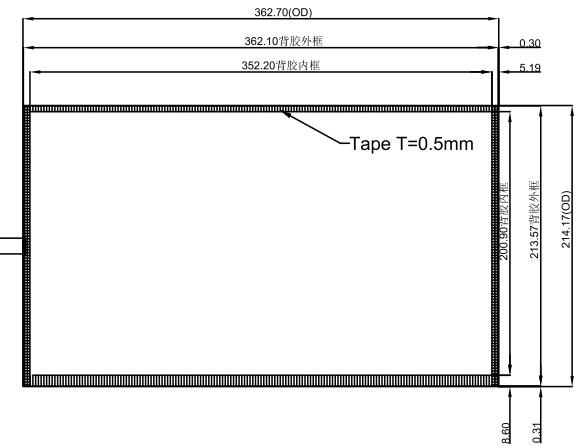

Parameter

- 1.circuit rank : DC 3~15V,1mA
2. Insulation resistance >20MΩ, 25V(DC);
- 3.Linearity :≤1.5%;
- 4.light Transparency : >75%;
- 5.operating Force: 10-120g
- 6.responstion time: <10ms
- 7.rigidity: 3H
- 8.Tapping durability: >1,000,000 times;  
Pen sliding durability: >100,000 times;
- 9.Operating environment: -20°C~+70°C;
10. Storage environment: -30°C~+80°C;
- 11.Unspecified Tolerance:±0.30mm
- 12.DOT point 3X3

PIN OUT	PIN1-PIN3	400ohm-1200ohm
1	Y+	PIN2-PIN4
2	X-	100ohm-550ohm
3	Y-	
4	X+	

Part No.		MST-RT-TPS-15.6			
 Product Name: 15.6 inch Touch Panel		Drawing No.	R156S211206		
		Project Code.	R156S		
Designed by:	Curry.Wang	Business Unit:	Period Mark	View Angle	
Checked by:	Betty.Fu		SNT-BTP	A	 1:1
Approved by:	Cale.Chen				
Workmanship:	Elite.Ai	BOM Code	1.14.156.01.0000	Page 1	
Standardization:	Link.Chen	Product Series	BTP-RT	Total 1 Page	
Released by:	Rocky.Liu	 思诺泰科电子(苏州)有限公司 SINOTRONICS INC.			